

Hi-MO X6^{Max} Scientist

LR7-72HTH

620~635M

- Suitable for Distribution Market
- Simple design embodies modern style
- Highest efficiency with the best energy generation performance
- Better product warranty, better service



15-year Warranty for
Materials and Processing



25-year Warranty for Extra
Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

LONGi



23.5%
MAX MODULE
EFFICIENCY



0~5W
POWER BINNING
TOLERANCE

<1%
FIRST YEAR
POWER DEGRADATION

0.40%
YEAR 2-25
POWER DEGRADATION


Additional Value

25-Year Power Warranty

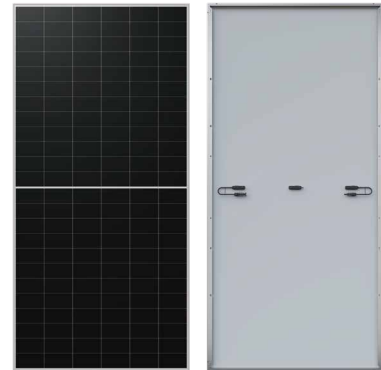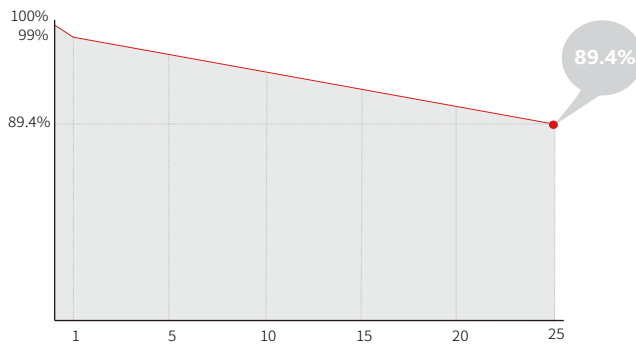

Mechanical Parameters

Cell Orientation	144 (6×24)
Junction Box	IP68
Output Cable	4mm ² , +400, -200mm/±1400mm length can be customized
Glass	Single glass, 3.2mm coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	28.5kg
Dimension	2382×1134×30mm
Packaging	36pcs per pallet / 144pcs per 20' GP / 720pcs per 40' HC
Connector	EVO2(Staubli), PV-LR5(LONGi)

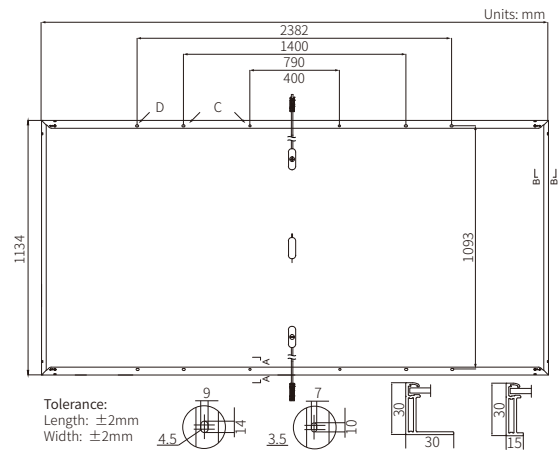

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C

NOCT : AM1.5 800W/m² 20°C 1m/s

Test uncertainty for Pmax: ±3%

Module Type	LR7-72HTH-620M		LR7-72HTH-625M		LR7-72HTH-630M		LR7-72HTH-635M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	620	463.4	625	467.1	630	470.8	635	474.5
Open Circuit Voltage (Voc/V)	52.72	49.59	52.87	49.64	53.02	49.78	53.17	49.92
Short Circuit Current (Isc/A)	14.93	12.06	15.01	12.12	15.07	12.17	15.15	12.23
Voltage at Maximum Power (Vmp/V)	44.48	40.59	44.63	40.73	44.78	40.87	44.93	41.00
Current at Maximum Power (Imp/A)	13.94	11.42	14.01	11.47	14.07	11.52	14.14	11.59
Module Efficiency(%)	23.0		23.1		23.3		23.5	

Operating Parameters

Operational Temperature	-40°C ~ +40°C
Power Measurement Tolerance	± 3%
Power Binning Tolerance	0 ~ 5W
Maximum System Voltage	DC1500V (IEC/UL)
Maximum Series Fuse Rating	25A
Voc&Isc Measurement Tolerance	± 5%
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	IEC Class C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.230%/°C
Temperature Coefficient of Pmax	-0.280%/°C