

# THE Vertex

## BIFACIAL DUAL GLASS MONOCRYSTALLINE MODULE

# 505W

MAXIMUM POWER OUTPUT

# 21.0%

MAXIMUM EFFICIENCY

# 0~+5W

POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading total solution provider for solar energy. With local presence around the globe, Trina Solar is able to provide exceptional service to each customer in each market and deliver our innovative, reliable products with the backing of Trina as a strong, bankable brand. Trina Solar now distributes its PV products to over 100 countries all over the world. We are committed to building strategic, mutually beneficial collaborations with installers, developers, distributors and other partners in driving smart energy together.

### Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716/UL61730  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System




#### PRODUCTS

TSM-DEG18MC.20(II)

#### POWER RANGE

480-505W

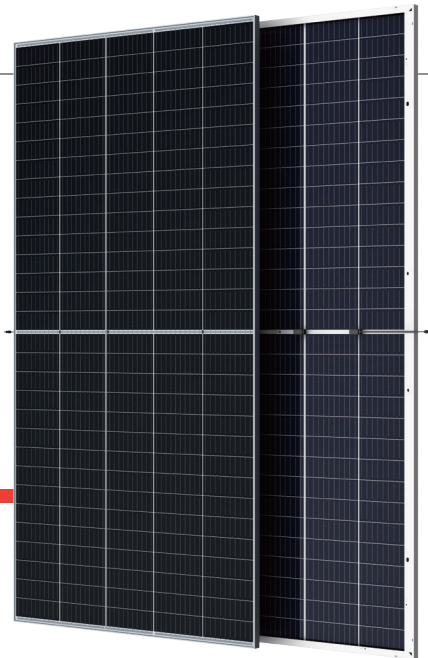

### High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation; extended 30-year warranty
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



### High power up to 505W

- Large area cells based on 210mm silicon wafers and 1/3-cut cell technology
- Up to 21.0% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



### High reliability


- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load




### High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Up to 25% additional power gain from back side depending on albedo


### Trina Solar's Vertex Bifacial Dual Glass Performance Warranty

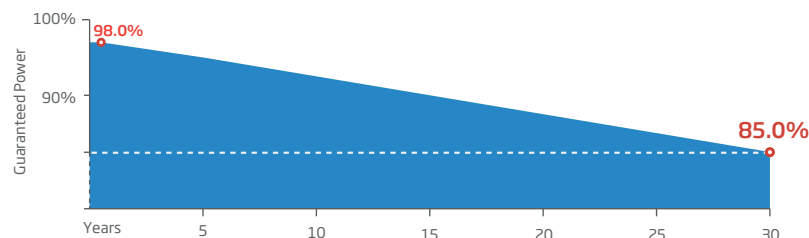


## DIMENSIONS OF PV MODULE(mm)

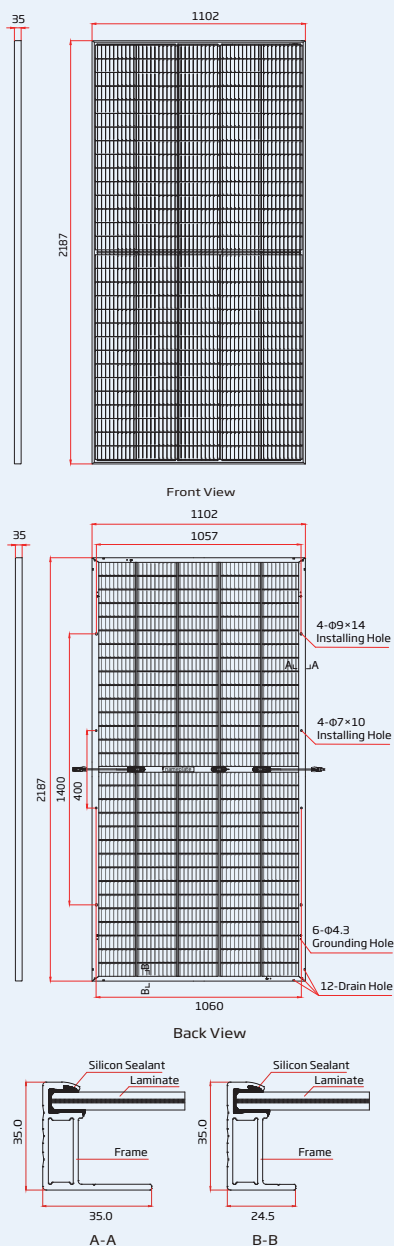

## I-V CURVES OF PV MODULE(500 W)

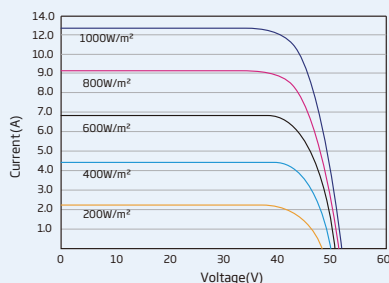

## P-V CURVES OF PV MODULE(500W)

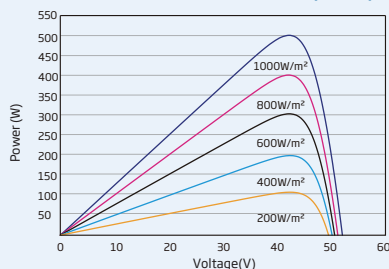

## ELECTRICAL DATA (STC)

Peak Power Watts- $P_{MAX}$ (Wp)*	480	485	490	495	500	505
Power Tolerance- $P_{MAX}$ (W)	0 ~ +5					
Maximum Power Voltage- $V_{MPP}$ (V)	42.2	42.5	42.8	43.1	43.4	43.7
Maximum Power Current- $I_{MPP}$ (A)	11.38	11.42	11.45	11.49	11.53	11.56
Open Circuit Voltage- $V_{OC}$ (V)	50.7	50.9	51.1	51.3	51.5	51.7
Short Circuit Current- $I_{SC}$ (A)	11.97	12.01	12.05	12.09	12.13	12.17
Module Efficiency $\eta_m$ (%)	19.9	20.1	20.3	20.5	20.7	21.0

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
\*Measuring tolerance:  $\pm 3\%$ .

## Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power - $P_{MAX}$ (Wp)	514	519	524	530	535	540
Maximum Power Voltage- $V_{MPP}$ (V)	42.2	42.5	42.8	43.1	43.4	43.6
Maximum Power Current- $I_{MPP}$ (A)	12.18	12.22	12.24	12.29	12.34	12.39
Open Circuit Voltage- $V_{OC}$ (V)	50.7	50.9	51.1	51.3	51.5	51.7
Short Circuit Current- $I_{SC}$ (A)	12.81	12.85	12.89	12.94	12.98	13.02
Irradiance ratio (rear/front)	10%					

Power Bifaciality: 70 $\pm$ 5%.

## ELECTRICAL DATA (NOCT)

Maximum Power- $P_{MAX}$ (Wp)	362	366	369	373	377	381
Maximum Power Voltage- $V_{MPP}$ (V)	38.7	40.0	40.2	40.5	40.7	41.0
Maximum Power Current- $I_{MPP}$ (A)	9.11	9.15	9.18	9.22	9.26	9.29
Open Circuit Voltage- $V_{OC}$ (V)	47.7	47.9	48.0	48.2	48.4	48.5
Short Circuit Current- $I_{SC}$ (A)	9.65	9.68	9.71	9.74	9.78	9.81

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	150 cells
Module Dimensions	2187 $\times$ 1102 $\times$ 35 mm (86.10 $\times$ 43.39 $\times$ 1.38 inches)
Weight	30.1 kg (66.4 lb)
Front Glass	2.0 mm (0.08 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	35mm(1.38 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: 280/280 mm(11.02/11.02 inches) Landscape: 1400/1400 mm(55.1 <sup>2</sup> /55.1 <sup>2</sup> inches)
Connector	MC4 EV02 or TS4 Plus*

\*Available in either option

## TEMPERATURE RATINGS

NOCT(Nominal Operating Cell Temperature)	43°C ( $\pm 2^\circ\text{C}$ )
Temperature Coefficient of $P_{MAX}$	- 0.34%/°C
Temperature Coefficient of $V_{OC}$	- 0.25%/°C
Temperature Coefficient of $I_{SC}$	0.04%/°C

## MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
	1500V DC (UL)
Max Series Fuse Rating	25A*

\*Recommended

## WARRANTY

12 year Product Workmanship Warranty
30 year Power Warranty
2% first year degradation
0.45% Annual Power Attenuation

(Please refer to product warranty for details)

## PACKAGING CONFIGURATION

Modules per box: 31 pieces
Modules per 40' container: 558 pieces